

**DEVELOP**

Dynamic balance


[www.develop.eu](http://www.develop.eu)



# ineo+ 3300i

- > Colour A4 printer
- > Up to 33 ppm

## Option diagram

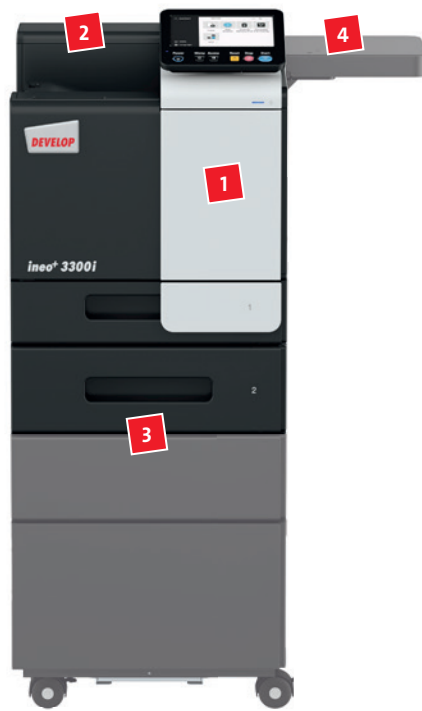

### 1 Connectivity

Wireless LAN  
UK-221

USB I/F kit  
EK-P08

OR

USB I/F kit  
EK-P09

NFC interface  
EK-P10

I/F cable for  
CSRC modem  
EK-P11

Biometric authentication  
AU-102

OR

ID card reader

Mount kit  
MK-P08

### 2 Others

Working table  
WT-P03

10-Key pad  
KP-P03

Keyboard holder  
KH-P02

Air cleaning unit  
CU-202

Mount kit  
MK-P09

### 3 Media Input

Paper tray  
PF-P20

Height adjustment unit  
PF-P22

Copier desk  
DK-P04x

### 4 Media output

Off-line stapler  
FS-P04

#### Legend

- Mandatory option
- Option
- This option can only be installed with the respective option above it

## Finishing functionalities



Duplex



Corner  
stapling  
(offline)

## Description

Connectivity	
UK-221 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
EK-P08 USB I/F kit	USB keyboard connection
EK-P09 USB I/F kit	USB keyboard connection; Bluetooth
EK-P10 NFC interface	To connect with Android mobile devices
EK-P11 I/F cable for CSRC modem	GPRS modem connection for CSRC
AU-102 Biometric authenticaton	Finger vein scanner
ID card reader	Various ID card technologies
MK-P08 Mount kit	Installation kit for ID card reader

Others	
WT-P03 Working table	Authentication device placement
KP-P03 10-Key pad	For use instead of touchscreen
KH-P02 Keyboard holder	To place USB keyboard
CU-202 Air cleaning unit	Improving indoor air quality by reduced emissions
MK-P09 Mount kit	Installation kit for Air cleaning unit

Media Input	
PF-P20 Paper tray	500 sheets, A4, 60-90 g/m <sup>2</sup>
PF-P22 Height adjustment unit	To achieve comfortable height for operation
DK-P04x Copier desk	Provides storage space for print media and other materials

Media output	
FS-P04 Off-line stapler	20-sheet off-line stapling

## Technical specifications

### SYSTEM SPECIFICATIONS

Panel size/resolution	7" / 800 x 480
System memory (standard/max)	3,072 MB
System hard disk	8 GB (standard)
Interface	10/100/1,000-Base-T Ethernet; USB 2.0; Wi-Fi 802.11 b/g/n (optional)
Network protocols	TCP/IP (IPv4/IPv6); SMB; LPD; IPP; SNMP; HTTP(S); AppleTalk; Bonjour
Paper input capacity (standard/max)	600 sheets / 1,100 sheets
Paper tray input (standard)	1x 500 sheets; A6-A4; custom sizes; 60-210 g/m <sup>2</sup>
Paper tray input (optional)	1x 500 sheets; A4; 60-90 g/m <sup>2</sup>
Manual bypass	100 sheets; A6-A4; Custom sizes; 60-210 g/m <sup>2</sup>
Automatic duplexing	A5-A4; 60-210 g/m <sup>2</sup>
Finishing modes (optional)	Group; Sort; Staple (offline)
Output capacity (standard)	Max. 250 sheets
Print volume (monthly)	Rec. 6,500 pages; Max. <sup>1</sup> 96,000 pages
Toner lifetime	Black up to 13,000 pages CMY up to 9,000 pages
Imaging unit lifetime	Black up to 154,000 pages (imaging unit) CMY up to 55,000 pages (imaging unit)
Power consumption	220-240 V / 50/60 Hz; Less than 1.45 kW
System dimension (W x D x H)	420 x 528 x 473 mm (without options)
System weight	Approx. 33.2 kg (without options)

### PRINTER SPECIFICATIONS

Imaging technology	Laser
Toner technology	HD polymerised toner
Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi
Print Speed A4 (mono/colour)	Up to 33/33 ppm
1 <sup>st</sup> print out time A4 (mono/colour)	8.7/9.6 sec.; Warm-up time Approx. 13 sec. in mono; 15 sec. in color <sup>2</sup>
Page description language	PCL 6 (XL3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS
Operating System	Windows 7 (32/64); Windows 8/8.1 (32/64); Windows 10 (32/64); Windows Server 2008 (32/64); Windows Server 2008 R2; Windows Server 2012; Windows Server 2012 R2; Windows Server 2016; Windows Server 2019; Macintosh OS X 10.10 or later; Unix; Linux; Citrix
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Mobile printing	AirPrint (iOS); Mopria (Android); ineoPRINT (iOS/Android/Windows 10 Mobile); Mobile Authentication and Pairing (iOS/Android) Optional: WiFi Direct

**SYSTEM FEATURES**

<b>Security Functions (standard)</b>	ISO 15408 HCD-PP Common Criteria (in evaluation); IP filtering and port blocking; SSL2; SSL3 and TLS1.0/1.1/1.2 network communication; IPsec support; IEEE 802.1x support; User authentication; Authentication log; Secure print; Kerberos; Memory data auto deletion; Print user data encryption
<b>Accounting (standard)</b>	Up to 100 user accounts; Active Directory support (user name + password)
<b>Accounting Functions (optional)</b>	Biometric authentication (finger vein scanner); ID card authentication (ID card reader); Authentication by mobile device (Android/iOS)
<b>Software</b>	store+find (opt.); convert+share (opt.); Device Manager; Box Operator; Data Administrator (user accounts & cost centres); Card solutions (opt.); EveryonePrint (opt.)

<sup>1</sup> If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

<sup>2</sup> Warm-up time may vary depending on the operating environment and usage



**DEVELOP**

Konica Minolta Business Solutions Europe GmbH  
Europaallee 17 30855 Langenhagen Germany Phone +49 511 7404-0 [www.develop.eu](http://www.develop.eu)

- All specifications refer to A4-size paper of 80 g/m<sup>2</sup> quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- DEVELOP and ineo are registered trademarks/product titles owned by Konica Minolta Business Solutions Europe GmbH.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.